

Automatic Motorized Firer Rated Industrial Sectional Door Systems E15,E30,E60,E90,E120 Fire Resistant Certificate



MAdoorS Fire Rated Automatic Sectional Door

FRSD-300 EI₁ 60 , EI₁ 90 , EI₁ 120 and other The fire-resistant overhead door is a reliable and highly effective door with a fire resistance of EI₁ 60 , EI₁ 90 , EI₁ 120 minutes. The fire-resistant madoors door is a reliable and highly effective door with a fire resistance of EI₁ 60 , EI₁ 90 , EI₁ 120 minutes.

Ideally suited for closing large halls and commercial fire and hazardous areas, storage for dangerous materials, such as PGS15 areas. When connected to a fire alarm system, the overhead door closes automatically after a fire alarm. The special baffle prevents flashback. The madoors door can be operated for daily use. Standard available in zinc plated steel or RAL 9002. Optionally available in all RAL colors.

For daily use.

Classification EI₁ 60 , EI₁ 90 , EI₁ 120 and other

Tested conform NEN-EN 1634-1

Door weight 35 kg /m²

Suitable for PGS15 (storage dangerous goods)

Smoke resistant conform to SM/SA

Liquid barrier 400 mm

Integrated pedestrian door



Address : Saray Mahallesi / Atom Caddesi / Küme Evleri

Number : 155 Kahramankazan ANKARA / TÜRKİYE


Phone : 00 90 312 354 64 22 Mobil Phone : 00 90 530 174 30 56

e-mail : info@madoors.com.tr

www.madoors.com.tr



Accessories ;

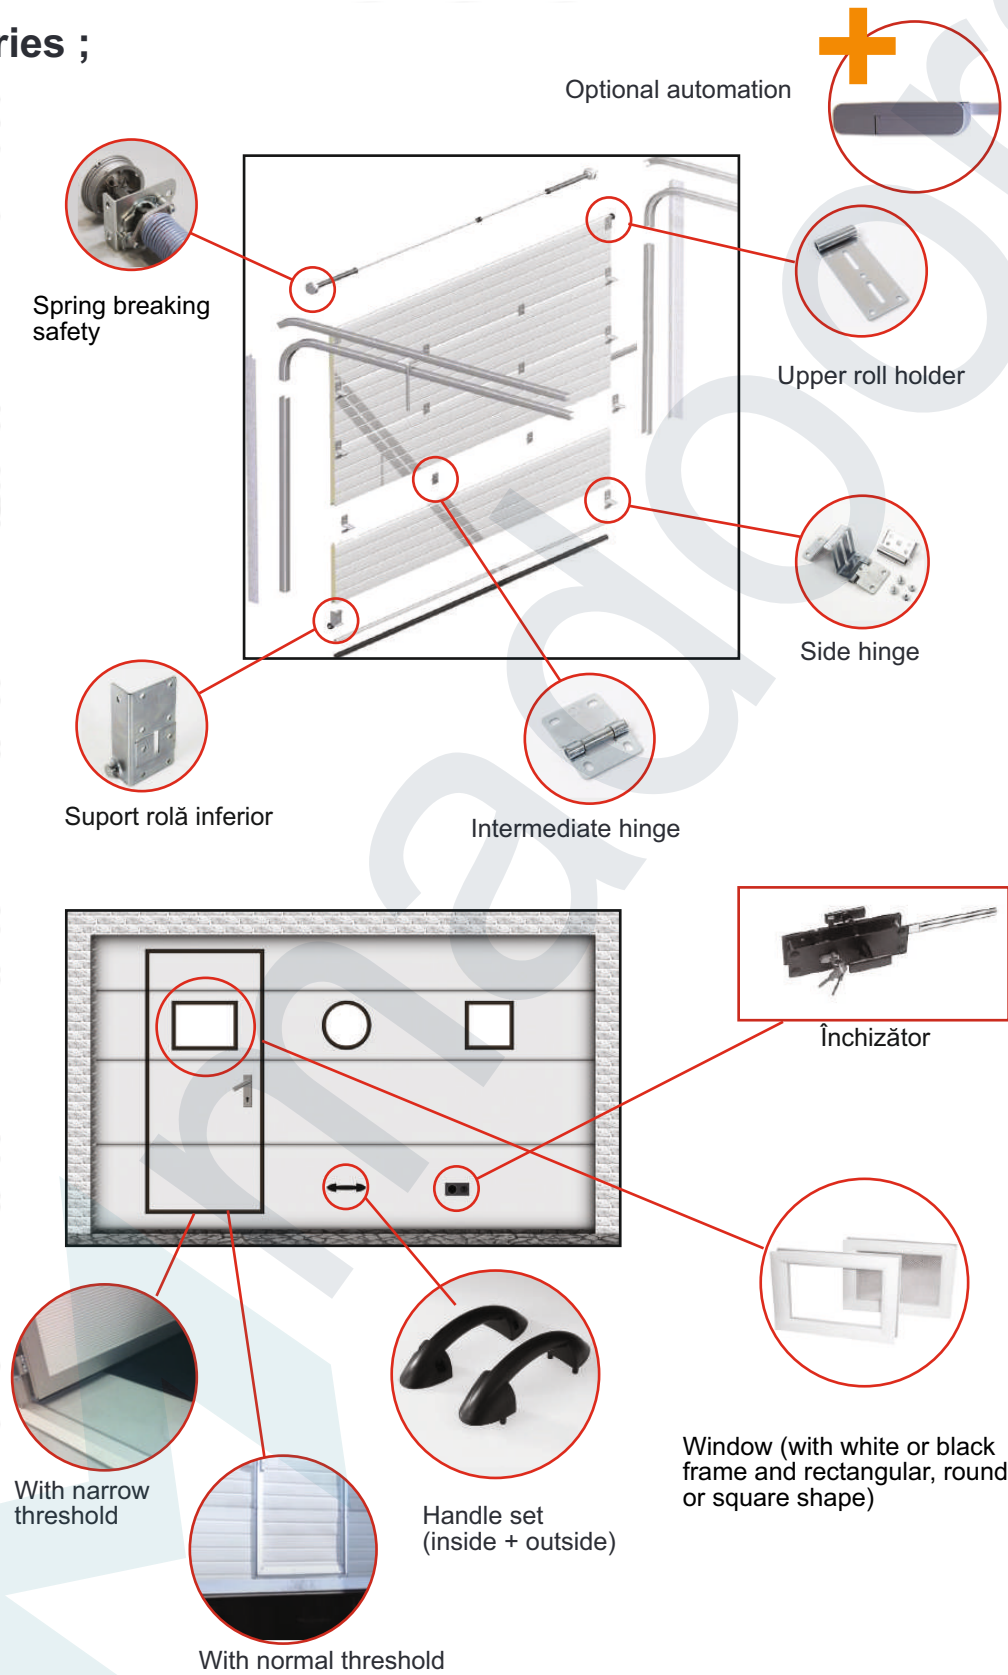

* Accessories (hardware) can be customised by electrostatic painting the set of rails, hinges, springs and panel ends

PANELS ;



FIRE RESISTANT PANELS




Address : Saray Mahallesi / Atom Caddesi / Küme Evleri
Number : 155 Kahramankazan ANKARA / TÜRKİYE
Phone : 00 90 312 354 64 22 Mobil Phone : 00 90 530 174 30 56

e-mail : info@madoors.com.tr

www.madoors.com.tr



PANELS ;

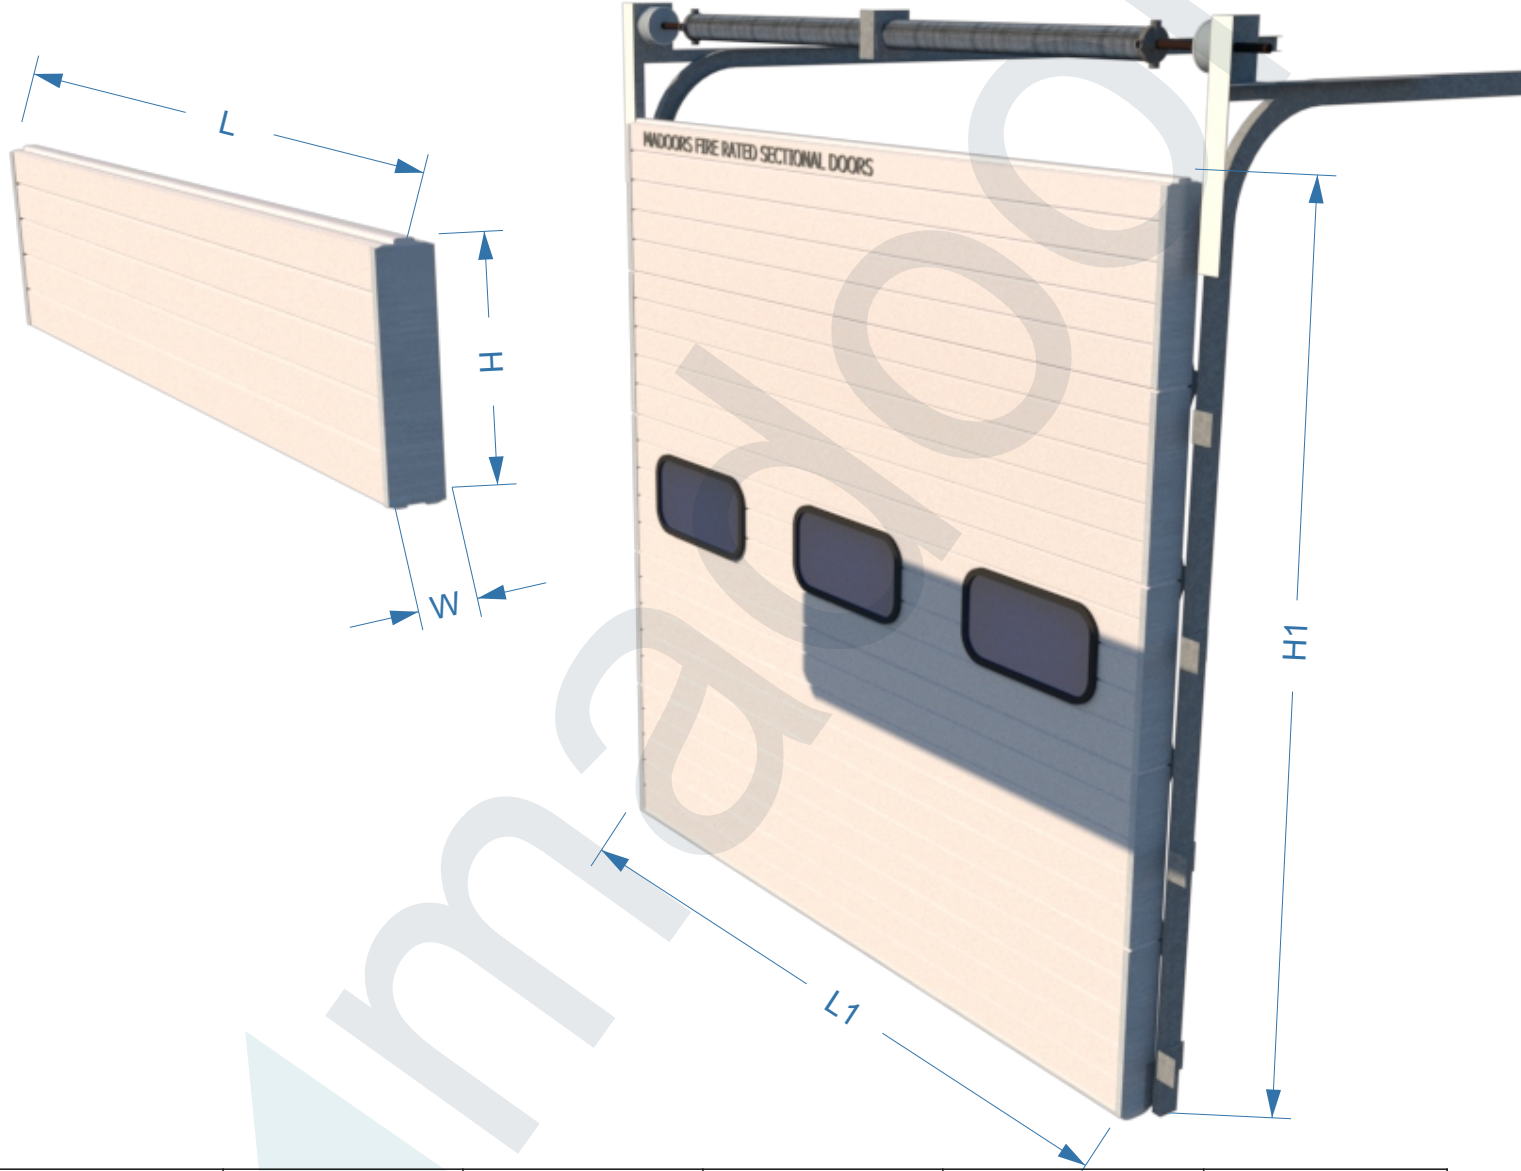

	L (METERS)	H (CM)	W (CM)	H1 (METERS)	L1 (METERS)
E30	2 - 15	30-40-50	5	2 - 15	2 - 6
E60	2 - 15	30-40-50	8	2 - 15	2 - 6
E90	2 - 15	30-40-50	10	2 - 15	2 - 6
E120	2 - 15	30-40-50	12	2 - 15	2 - 6

